



About Us

AMAZE THE UNEXPLORED **DESIGNER ADVENTURE.**

Notto Granito brings to you premium ceramic tiles that are detailed with perfection. Each tile is made using state of the art technology making them strong, durable & easy to maintain.

The Indian consumers' rapidly growing appetite for style and aesthetics is the inspiration behind every design of Notto Granito and its pace to keep up with the customer and market demands have made Notto Granito a synonym for quality, service, and innovation - not only in the domestic market but in the international market too.



PRODUCT FORMAT


Size:

600X1200 MM

Finish: Thickness:

MATT 9.0mm (approx.)

Wooden Effect Tiles are one of a kind as they not only give a classy and refined look to any space but also prevent wastage of time and money on installation and maintenance.

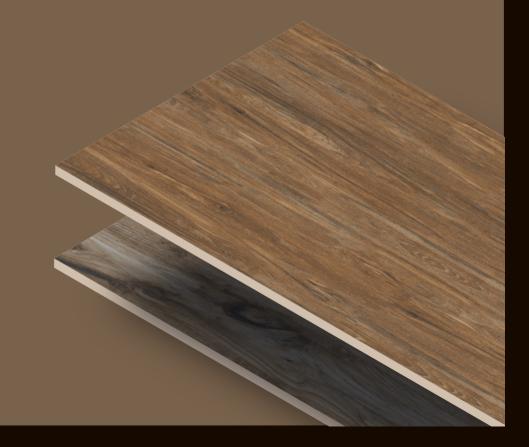





Wood Texture


Wood effect unlike natural timber, our plank tiles are incredibly hard-wearing, really easy to live with, and won't rot or warp when they get wet.







Wood effect unlike natural timber, our plank tiles are incredibly hard-wearing, really easy to live with, and won't rot or warp when they get wet.

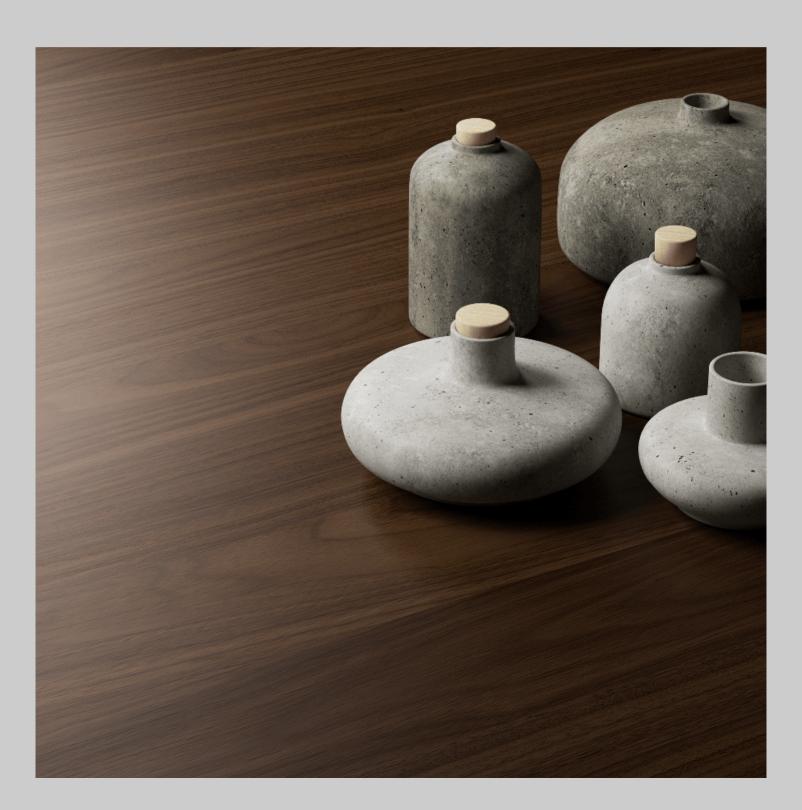

APPLICATION



Greet a complete home solution product range with us.

One of the most popular practices for modern-day homes is to extend the flooring of the Living room to the kitchen.

A well designed Matt finish tiles that will perfectly complement your trendy space.

FEATURES



The parameter used for slip resistance is called the Coefficient of Friction (COF). The higher the COF, the better the slip resistance of the tiles. Unglazed tiles, mosaic tiles (with many grout joints) and rough surfaced tiles are less slippery when compared with smooth and HIGH GLOSSY glazed tiles.

Therefore, these tiles are more slip resistant and are recommended to be used in industrial, kitchen, bathroom floor and swimming pool areas.












































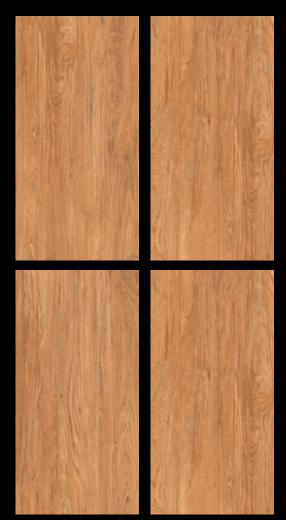






































































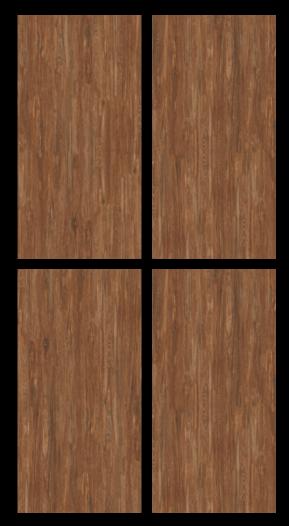










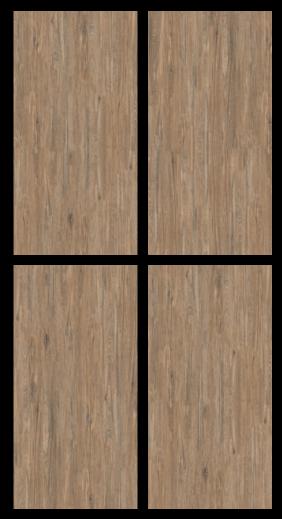










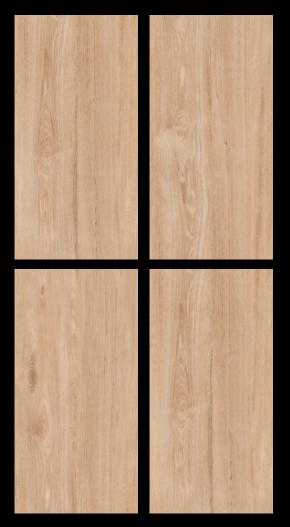




















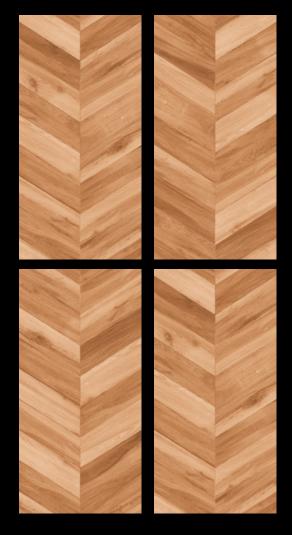






































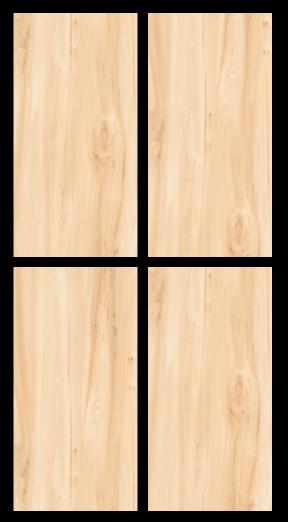
























































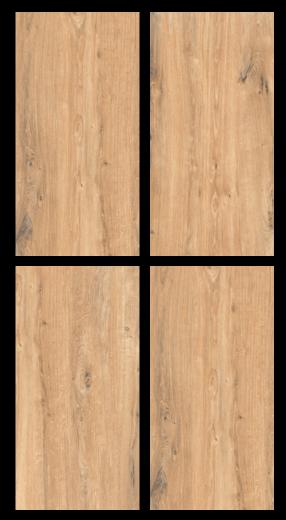



TECHNICAL SPECIFICATION

TEST DISCRIPTION	STANDARD AS PER IOS-13006/EN177 GROUP BIB	MEAN VALUE
Deviation in length & width	±0.6 %	±0.3 %
Deviation in thickness	±5.0 %	±4.0 %
Straightness in side	±0.5 %	±0.1 %
Rectangularity	±0.5 %	±0.1 %
Surface flatness	±0.5 %	±0.2 %
Color difference	Unaltered	No change
Glossiness	As per mfg.	As per square
Water absorption	≤ 3 %	≤ 3 %
Modulus of rupture	Min. 35 N/mm²	Min. 35 N/mm²
Impact resistance	As per mfg.	Min. 0.55 Porcelain
Surface abrasion resistance	As per mfg.	PEI II-V
MOH's hardness	As per mfg.	Min.7
Frost resistance	No damage	No damage
Thermal shock resistance	No damage	No damage
Moisture expansion	Nil	Nil
Chemical resistance	No damage	No damage
Stain resistance	Resistant	Resistant
Crazing resistance	As per mfg.	2 Cycle

PACKING DETAIL

Size	Thickness (approx.)	Pieces / Box	Area / Box	Wt./Box (approx.)
600x1200mm	9.0 mm (Approx.)	2 pcs.	1.44 sq. mtr.	28 kgs.



Notto Granito LLP.

Jetpar Pipali Road, Nr. Bela Village , At , Rangpar Morbi - 363642

www.nottogranito.com | info@nottogranito.com